

欣业机械
XINYE MACHINE

XINYE

耀安市欣业包装机械有限公司
Rui'an Xinye Packaging Machine Co., Ltd
厂址: 浙江台州市上盘镇永光工业区 (1014国道旁)
手机: 13958501308
销售(国内): 86-577-65162211
销售(国外): 86-577-65132286 65162200
传真: 86-577-65132272
邮编: 325206
网址: www.xinye.com
邮箱: xinye@xinye.cn

Add: No.104 Main Roadside,Yongguang Zone,
Shanggang,Rui'an,Zhejiang,China
M.T. 13958501308
Sales Dept (Domestic): 86-577-65162211
Sales Dept (Foreign): 86-577-65132286 65162200
Fax: 86-577-65132272
P.C. 325206
http://www.xinye.com
E-mail: xinye@xinye.cn



PLASTIC
MACHINE

气泡膜制袋机专业制造商
Professional Manufacturer of Bubble
Bag Making Machine

品牌源于品质, 口碑来自真诚
Brand comes from quality, and reputation comes from sincerity.

0102-欣业机械 XINYE MACHINE

www.xinye.com


XYXFD-A

Automatic Bubble Film Envelop Making Machine

全自动气泡膜信封制袋机

One by One. None-stop material changing

【一出一不停机换料】



USAGE CHARACTERISTIC

- 本机是制作复合气泡材料全自动设备, 适用材料: PE共挤膜复合、珠光膜复合、珍珠复合。
- 该设备功能密封合、折边、上胶条、测距、裁切, 裁切刀一体, 开配器不停机换料, 收放料, 收膜剪等功能, 由电脑全自动控制完成整个制袋过程, 生产的气泡信封线平整、平整、长度准确, 是生产复合气泡膜的专用设备。
- 此 bubble bag making equipment specially designed for compound bubble film, Suitable materials: PE co-extrusion film with laminated, pearl film with laminated, aluminum foil film, PE foam thermal compound, PE foam laminated materials.
- The machine has laminating, sealing, rolling, atirping, locking, cutting functions in one line, it also equips none-stop material changing, double unwinding, double photoed tracking functions which are controlled by computer. The end product is in good condition of firm, smooth, accurate length, it is the best equipment for the producing high peater bubble bag.

主要技术参数 MAIN TECHNICAL VARIABLES

型号 Model	880#	855#
适用材料 Suitable material	复合气泡膜、热胶板、美罗布	Al: Bubble film(25-150g), tape
材料要求 Material requirements	PE共挤复合、珠光膜复合、珍珠复合	PE co-extruding and laminating film, pearlized film with laminated film, aluminum foil
最大收卷直径 Max. loading diameter	气泡膜φ1400mm	bubble film φ1400mm
最大收卷宽度 Max. loading width	气泡膜φ1500mm	bubble film φ1500mm
最大袋子长度 Max. bag length	4700mm(带舌式)	4700mm(including the tongue of bag)
最大袋子宽度 Max. bag width	4500mm	4500mm
制袋速度 speed of bag making	10-40m/min(小袋子速度加倍)	10-40m/min(double speed of small bag)
整机功率 total power	18kw	18kw
工作电压 Voltage	3phase AC380V 50Hz	3Phase AC380V 50Hz
机器尺寸 L x W x H	1800x 2500 x 2500mm	1800x 2500 x 2500mm

XYXFD-B

Automatic Bubble Film Envelop Making Machine

全自动气泡膜信封制袋机

Tow by One. Online compound kraft paper, pearlized film

【一出二在线复合牛皮纸/珠光膜】



USAGE CHARACTERISTIC

- 本机是专为牛皮纸气泡膜在线复合设计的制袋设备，并可进行共挤膜气泡膜信封制袋（共挤膜气泡膜信封制袋时，必须使用复合好的材料）。
- 该设备：先将牛皮纸和气泡膜通过热轧热复合后，再经热压辊封成后直接制成牛皮纸气泡膜信封。该机采用了先进的电、气、磁、液一体化控制技术，采用材料数据集成成型，均由电脑控制，输出的袋子平整美观，符合国家标准，操作方便。
- 此气泡膜制袋设备专门设计用于牛皮纸气泡膜信封。它也可以同时生产复合膜气泡膜信封。该设备的热复合部分，先将牛皮纸和气泡膜通过热轧热复合后，再经热压辊封成后直接制成牛皮纸气泡膜信封。该机采用了先进的电、气、磁、液一体化控制技术，采用材料数据集成成型，均由电脑控制，输出的袋子平整美观，符合国家标准，操作方便。

主要技术参数 MAIN TECHNICAL VARIABLES

型号 Model	规格 Size	规格 Size
适用材料 Suitable material	牛皮纸/珠光膜 Laminating kraft paper (85-140g)	气泡膜/珠光膜 Air bubble film (25-150g), top
材料要求 Material requirements	PE或PP热封牛皮纸、PE共挤膜、珠光膜复合	With PE or PP film on surface of kraft paper PE co-extruding and laminating film, pearlized film with laminated, aluminum foil
最大取卷直径 Max. loading diameter	纸 φ600mm, 气泡膜 φ1400mm	paper φ600mm, bubble film φ1400mm
最大取卷宽度 Max. loading width	纸 ≤1500mm, 气泡膜 ≤1300mm	paper ≤1500mm, bubble film ≤1300mm
最大袋子长度 Max. bag length	≤750mm(指袋舌口)	≤750mm(including the tongue of bag)
最大袋子宽度 Max. bag width	≤550mm	≤550mm
制袋速度 speed of bag making	10-40m/min(小袋子速度加倍)	10-40m/min(double speed of small bag)
整机功率 Total power	22KW	22KW
工作电压 Voltage	3Phase AC380V 50Hz	3Phase AC380V 50Hz
机器尺寸 L*W*H	21000×2500×2800mm	21000×2500×2800mm

XYXFD-C

Automatic Bubble Film Envelop Making Machine

全自动气泡膜信封制袋机

Common triangle feeding

【普通三角放料】



USAGE CHARACTERISTIC


- 本机是制作复合气泡膜全自动设备，适用材料：PE共挤膜复合、珠光膜复合、胶膜复合、珍珠膜复合、复合膜复合。
- 该设备功能包括：折边、胶接、跟踪、裁切为一体，由电脑全自动控制完成整个制袋过程。本机还可生产珍珠膜信封袋，输出的袋子平整牢固、平整、长度准确，是生产复合气泡膜的专用设备。
- 此气泡膜制袋设备专门设计用于复合膜气泡膜信封。它也可以同时生产复合膜气泡膜信封。该设备的热复合部分，先将牛皮纸和气泡膜通过热轧热复合后，再经热压辊封成后直接制成牛皮纸气泡膜信封。该机采用了先进的电、气、磁、液一体化控制技术，采用材料数据集成成型，均由电脑控制，输出的袋子平整美观，符合国家标准，操作方便。

主要技术参数 MAIN TECHNICAL VARIABLES

型号 Model	规格 Size	规格 Size
适用材料 Suitable material	复合气泡膜、热胶膜、珠光膜	PE co-extruding and laminating film, bubble film (25-150g), top
材料要求 Material requirements	PE共挤膜、珠光膜复合、胶膜复合	PE co-extruding and laminating film, pearlized film with laminated, aluminum foil
最大取卷直径 Max. loading diameter	气泡膜 φ1400mm	bubble film φ1400mm
最大取卷宽度 Max. loading width	纸 ≤1500mm	bubble film ≤1500mm
最大袋子长度 Max. bag length	≤750mm(指袋舌口)	≤750mm(including the tongue of bag)
最大袋子宽度 Max. bag width	≤550mm	≤550mm
制袋速度 speed of bag making	10-40m/min(小袋子速度加倍)	10-40m/min(double speed of small bag)
整机功率 Total power	18KW	18KW
工作电压 Voltage	3Phase AC380V 50Hz	3Phase AC380V 50Hz
机器尺寸 L*W*H	13000×2500×2500mm	13000×2500×2500mm

XYXFD-D

Automatic Bubble Film Envelop Making Machine
全自动气泡膜信封制袋机
Box bag/None-stop material changing
【立体袋/不停机换料】



USAGE CHARACTERISTIC

- 本机是制作复合气泡膜全自动设备。适用材料：PE共挤膜复合、珠光膜复合、铝箔复合、珍珠糖热复合、珍珠糖膜。
- 该机采用卷膜到卷、折边、上胶、裁切、装切为一体，由电脑全自动控制完成整个制袋过程。本机还可生产立体袋。可自动换边、手翻冲孔、三角冲孔。制袋的袋子封线圆滑、平整、长度准确。是生产复合气泡膜的最佳设备。

- Our bubble bag making equipment specially designed for compound bubble film. Suitable materials: PE co-extrusion film with laminated, pearl film with laminated, aluminum foil film PE foam thermal compound film, foam laminated materials.
- The machine has laminating, sealing, folding, shaping, heating, cutting functions in one line, which are controlled by computer. It is able to make box bag with auto side gusset, 0-aut-punching, triangle punching, etc. The end product is in good condition of film, smooth, accurate length. It is the best equipment for the producing soft paper bubble bag.

主要技术参数 MAIN TECHNICAL VARIABLES

型号 Model	800#	900#
适用材料 Suitable material	复合气泡膜、热塑胶、离型纸	Air bubble film(25-150g), tape
材料要求 Material requirements	PE共挤复合、珠光膜复合、铝箔复合	PE co-extruding and laminating film, pearlised film with laminated, aluminum foil
最大袋宽直径 Max. feeding diameter	气泡膜 φ1400mm	bubble film φ 1400mm
最大袋宽度 Max. feeding width	气泡膜 φ1000mm	bubble film φ1000mm
最大袋子长度 Max. bag length	≤650mm(除去舌口)	≤650mm(including the tongue of bag)
最大袋子宽度 Max. bag width	4500mm	4500mm
制袋速度 Speed of bag making	10-40m/min(袋子速度有档)	10-40m/min(double speed of small bag)
总功率 Total power	19KW	19KW
电压电压 Voltage	3phase AC380V 50Hz	3phase AC380V 50Hz
机器尺寸 L*W*H	16000×2600×3000mm	16000×2600×3000mm

XYQB-A

Bubble Film Bag Making Machine
普通气泡膜制袋机



www.raxinye.com

- 本机具自动计数、自动卷膜、翻袋长度由按键控制，带自动边边送料，可视操作，成品数量有数轴显示装置，使用方便。
- 适用材料：气泡膜、复合气泡膜、珍珠膜。
- 该机具有卷膜到卷、折边、上胶、裁切、装切为一体，由电脑全自动控制完成整个制袋过程。本机还可生产立体袋。可自动换边、手翻冲孔、三角冲孔。制袋的袋子封线圆滑、平整、长度准确。是生产复合气泡膜的最佳设备。

- The machine is equipped with auto-counting, auto-folding, auto-unwinding and auto-slitting system. The bag making length is controlled by switch, it can produce bags in two lines with device to collect and delivery and products in stack, which is convenient to operate.
- Suitable material: bubble film, pearlisation.
- The seal is strong, the speed is stable and uniform, and the flat bubble bags and bubble bags with tongue can be made.




主要技术参数

MAIN TECHNICAL VARIABLES

型号 Model	XYQB-800	XYQB-1000	XYQB-1200
制袋速度 Bag speed	10-200m/min	10-200m/min	10-210m/min
制袋长度 Bag Length	50-990mm	60-990mm	60-990mm
制袋速度 Speed	20-200pc/min	20-200pc/min	20-160pc/min
总功率 Total Power	3.2kw	4kw	5.5kw
机器重量 Weight of Machine	1200kg	1500kg	1500kg
机器尺寸 Overall Dimension(L*W*H)	4.4×2.8×1.75m	4.3×3.0×1.95m	4.2×3.0×2.0m

XYQB-B

Bubble Film Bag (Pearlized Film) Bag Making Machine
普通气泡膜/珍珠棉制袋机



www.raxinye.com

- 本机具自动计数、自动卷膜、翻袋长度由按键控制，带自动边边送料，可视操作，成品数量有数轴显示装置，使用方便。
- 适用材料：气泡膜、复合气泡膜、珍珠膜。
- 该机具有卷膜到卷、折边、上胶、裁切、装切为一体，由电脑全自动控制完成整个制袋过程。本机还可生产立体袋。可自动换边、手翻冲孔、三角冲孔。制袋的袋子封线圆滑、平整、长度准确。是生产复合气泡膜的最佳设备。

- The machine is equipped with auto-counting, auto-folding, auto-unwinding and auto-slitting system. The bag making length is controlled by switch, it can produce bags in two lines with device to collect and delivery and products in stack, which is convenient to operate.
- Suitable material: bubble film, pearlisation.
- The seal is strong, the speed is stable and uniform, and the flat bubble bags and bubble bags with tongue can be made.



主要技术参数

MAIN TECHNICAL VARIABLES

型号 Model	XYQB-800	XYQB-1000	XYQB-1200
制袋速度 Bag speed	10-200m/min	10-200m/min	10-210m/min
制袋长度 Bag Length	50-990mm	60-990mm	60-990mm
制袋速度 Speed	20-200pc/min	20-200pc/min	20-160pc/min
总功率 Total Power	3.2kw	4kw	5.5kw
机器重量 Weight of Machine	1200kg	1500kg	1500kg
机器尺寸 Overall Dimension(L*W*H)	4.4×2.8×1.75m	4.3×3.0×1.95m	4.2×3.0×2.0m


XYQB-C

Bubble Film Three-side Sealing Bag Making Machine
气泡膜三边封制袋机



www.raxinye.com

- 本机自动计数、自动折叠、制袋长度由按键控制，带自动折边送料，可连续作业，成品直接装箱码放，使用方便。
- 适用材料：气泡膜、复合气泡膜、珍珠棉。
- 封口牢固，速度稳定均匀，可制作平口及锯齿口气泡袋。
- The machine is equipped with auto-counting, auto-folding, auto-unwinding and auto-arming system. The bag making length is controlled by switch. It can produce bags in two lines with devices to collect and delivery end products in stack, which is convenient to operate.
- Applicable materials: bubble film, pearl cotton. The seal is strong, the speed is stable and uniform, and the flat bubble bags and bubble bags with tongue can be made.




主要技术参数 MAIN TECHNICAL VARIABLES

型号 Model	XYQB-1300	XYQB-1600	XYQB-1900
制袋宽度 Bag width	200-1200mm	200-1500mm	200-1750mm
制袋长度 Bag length	80-1600mm	80-1600mm	80-1600mm
制袋速度 Speed	15-80pc/min	15-80pc/min	15-80pc/min
总功率 Total power	9.8kw	10.8kw	11.8kw
机器重量 Weight of Machine	1500kg	1450kg	2000kg
外形尺寸 Overall Dimension(L*W*H)	4.4*2.8*1.75m	4.3*3.0*1.95m	4.3*3.5*2.2m


XYQB-D

Bubble Film Bag Making Machine(Auto glue spray)
气泡膜制袋机(自动喷胶)



www.raxinye.com

- 本机自动计数、自动折叠、制袋长度由按键控制，带自动折边送料，可连续作业，成品直接装箱码放，使用方便。
- 适用材料：气泡膜、复合气泡膜、珍珠棉。
- 封口牢固，速度稳定均匀，可制作平口及锯齿口气泡袋。
- The machine is equipped with auto-counting, auto-folding, auto-unwinding and auto-arming system. The bag making length is controlled by switch. It can produce bags in two lines with devices to collect and delivery end products in stack, which is convenient to operate.
- Applicable materials: bubble film, pearl cotton. The seal is strong, the speed is stable and uniform, and the flat bubble bags and bubble bags with tongue can be made.



主要技术参数 MAIN TECHNICAL VARIABLES

型号 Model	XYQB-800	XYQB-1000	XYQB-1300
制袋宽度 Bag width	100-700mm	100-900mm	100-1150mm
制袋长度 Bag length	100-1000mm	100-1000mm	100-1000mm
制袋速度 Speed	20-110pc/min	20-130pc/min	20-110pc/min
总功率 Total power	8.8kw	4kw	10.3kw
机器重量 Weight of Machine	1300kg	1500kg	1700kg
外形尺寸 Overall Dimension(L*W*H)	4.4*2.8*1.75m	4.5*3.0*1.95m	4.5*3.5*2.2m

XYPEG-5LB

2-5 Layer Air Bubble Film Machine-3 Screws
2-5层复合型气泡膜机-3螺杆



- 本机适用材料为DPE和LDPE颗粒。
- 本机器设计为2-5层气泡膜（单层或平层+气层+平层+气层+平层）组合，该套机组由主机及附属送料系统组成，一共3个螺杆。
- 该机采用双螺杆设计，可分并控制每层气泡膜，具有调节简单、温度低、产量高、效率高、寿命长等优点。本机气泡膜复合平层底、珍珠棉、PE棉等产品。通过调整螺杆温度及气流直径：0.6-30mm,产品具有防水、耐压、防静电、隔热等作用；广泛应用于家具、包装、建材、电子、快递等包装行业。
- The main raw materials are DPE and LDPE particles.
- The machines can produce 2-5 layers of bubble film (lamination layer + flat film + bubble + flat film + lamination layer-5 layer), extruder is composed of main extruder and auxiliary extruder, total 3 screws.
- The main extruder is 2 screws design. It can independently control the bottom layer and the bubble layer, and has the advantages of easy operation, high output and beautiful bubble, produce laminates kraft paper, PE foam, PE aluminum plating film, PE film and other products. By changing the bubble mold or air flow diameter to change the diameter of bubble: 0.6-30mm, products are water proof, pressure proof, antistatic, insulation and so on, widely used in furniture, hard ware, building materials, electronics, courier and other packaging industry.



主要技术参数 MAIN TECHNICAL VARIABLES

型号 Model	XYPEG-1200	XYPEG-1600	XYPEG-1800	XYPEG-2000	XYPEG-2500	XYPEG-3000	XYPEG-3500
最大宽度 Max width	1200mm	1600mm	1800mm	2000mm	2500mm	3000mm	3500mm
螺杆直径 Screw Diameter	φ450mm	φ700mm	φ750mm	φ800mm	φ850mm	φ900mm	φ1100mm
	φ50mm	φ55mm	φ60mm	φ65mm	φ70mm	φ75mm	φ85mm
螺杆长度 Screw L/D	33:1	33:1	33:1	33:1	33:1	33:1	33:1
主电机功率 Extruder Motor Power	18.5/11kw	22/18kw	30/18kw	30/18.5kw	37/23kw	45/33kw	55/37kw
真空吸附功率 Vacuum Motor Power	1.1kw	1.5kw	1.5kw	1.5kw	2.2kw	3kw	3.7kw
速度 Speed	0-25m/min	0-25m/min	0-25m/min	0-25m/min	0-20m/min	0-20m/min	0-20m/min
总功率 Power	19kw	12kw	13kw	16kw	16kw	20kw	24kw

XYFM

Single-side Membrane Laminating Machine
单面淋膜机



- 本机为单面淋膜复合机，一次成型一层或两层，主要以纸、塑料、无纺布或铝箔为基材，通过挤出流延膜，使一层或两层基材淋膜或复合，经一次烘箱干燥，完成产品制作。
- 该机淋膜与流延（牛皮纸、PE纸、PE膜、PP膜、无纺布、塑料薄膜）及其复合材料，广泛应用于纸塑复合、塑料复合、纸塑复合、无纺布复合、纸塑复合等。
- This machine is a single extruder film composite unit, extruding one layer coat film of a time. Mainly paper, plastic film, non-woven or aluminum foil as the base materials. To film or compound one or two base materials by extruding the film.
- Such as disposable paper cup, non-woven film, etc.
- Using PE laminating film suitable application material: kraft paper (paper cup), high quality paper, cloth, Aluminum foil, plastic film and other composite materials. They are widely applicable for paper plastic composite, plastic composite, aluminum composite, non-woven aluminum film, paper aluminum composite, etc.



主要技术参数 MAIN TECHNICAL VARIABLES

型号 Model	XYFM-800	XYFM-1100	XYFM-1300	XYFM-1600	XYFM-1800	XYFM-2000
淋膜长度 Length of mold	1000mm	1300mm	1500mm	1800mm	2000mm	2200mm
淋膜宽度 Width of film	800mm	1100mm	1300mm	1600mm	1800mm	2000mm
速度 Speed	150m/min	150m/min	150m/min	150m/min	150m/min	150m/min
膜厚范围 Thickness laminating	0.06-0.15mm	0.06-0.15mm	0.06-0.15mm	0.06-0.15mm	0.06-0.15mm	0.06-0.15mm
螺杆直径 Screw Diameter	φ85mm	φ90mm	φ95mm	φ100mm	φ105mm	φ110mm
收卷最大直径 Max diameter rewinding	1200mm	1200mm	1200mm	1200mm	1200mm	1200mm
原料直径 Material diameter	1200mm	1200mm	1200mm	1200mm	1200mm	1200mm
总功率 Power	65kw	70kw	80kw	100kw	130kw	150kw
机座尺寸 L*W*H	12.5*6*3.2m	12.5*6*3.2m	13.8*6*3.2m	13.8*6*3.2m	13.8*6*3.2m	13.8*6*3.2m

XYPE-2LA

2 Layer Air Bubble Film Machine-1 Screw

两层气泡膜机-单螺杆挤出



- 本机可生产气泡膜（或气泡纸），挤压机为单螺杆设计。
- 主要原材料为 LDPE 和 LLDPE 颗粒。
- 主要原材料为 LDPE 和 LLDPE 颗粒。聚乙烯气-发泡剂（或发泡剂）吹塑成聚乙烯气膜，是当今普遍使用的一种包装材料，不仅具有良好的减震性、抗冲击性、热合性；还有耐腐蚀性、透明性好等优点，广泛用于家用包装袋、精密仪器、自行车、家庭健身器材等多种包装。
- The machine can produce 2 layers of bubble film (or bubble), the extruder is single screw design.
- Main raw materials are LDPE and LLDPE particles.
- Polyethylene air-cushion film (also called polyethylene bubble film), which is divided into two kinds: ordinary polyethylene air-cushion film and composite polyethylene air-cushion film, is a kind of packing material which has been used of present. It not only has good cushioning effect, shock resistance and heat-sealing performance, but also has such advantages as good corrosion resistance and transparency, etc. as it has been widely used for packing household ware, post parcel, precise instrument, bicycle, polyethylene furniture, etc.



主要技术参数

MAIN TECHNICAL VARIABLES

规格 Model	XYPE-1200	XYPE-1200	XYPE-1600	XYPE-1600	XYPE-2000	XYPE-2000
最大宽度 Max Width	1000mm	1200mm	1600mm	1600mm	2000mm	2000mm
螺杆直径 Screw Diameter	φ65mm	φ70mm	φ75mm	φ80mm	φ85mm	φ90mm
螺杆长度 Screw L/D	33:1	33:1	33:1	33:1	33:1	33:1
主电机功率 Take-up Motor Power	15kw	22kw	30kw	30kw	37kw	37kw
真空吸盘 Vacuum Pump	1.1kw	1.1kw	1.5kw	1.5kw	2kw	3kw
速度 Speed	5-20m/min	5-20m/min	5-20m/min	5-20m/min	5-20m/min	5-25m/min
总功率 Power	49kw	55kw	65kw	70kw	80kw	95kw


XYPE-2LB

2 Layer Air Bubble Film Machine-2 Screw

两层气泡膜机-双螺杆挤出



- 本机可生产气泡膜（或气泡纸），挤压机为双螺杆设计。
- 主要原材料为 LDPE 和 LLDPE 颗粒。
- 主要原材料为 LDPE 和 LLDPE 颗粒。聚乙烯气-发泡剂（或发泡剂）吹塑成聚乙烯气膜，是当今普遍使用的一种包装材料，不仅具有良好的减震性、抗冲击性、热合性；还有耐腐蚀性、透明性好等优点，广泛用于家用包装袋、精密仪器、自行车、家庭健身器材等多种包装。
- 该机可分开控制控制气泡膜，具有操作简单、速度快、产量高、外形美观等优点。
- The machine can produce 2 layers of bubble film (or bubble), the extruder is double screw design.
- Main raw materials are LDPE and LLDPE particles.
- Polyethylene air-cushion film (also called polyethylene bubble film), which is divided into two kinds: ordinary polyethylene air-cushion film and composite polyethylene air-cushion film, is a kind of packing material which has been used of present. It not only has good cushioning effect, shock resistance and heat-sealing performance, but also has such advantages as good corrosion resistance and transparency, etc. as it has been widely used for packing household ware, post parcel, precise instrument, bicycle, polyethylene furniture, etc.
- The machine can independent control the bottom layer and the bubble layer, and has the advantages of easy operation, high speed, high output and beautiful bubble.

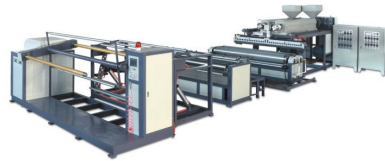

主要技术参数

MAIN TECHNICAL VARIABLES

规格 Model	XYPE-1200	XYPE-1600	XYPE-1800	XYPE-2000	XYPE-2500	XYPE-3000	XYPE-3500
最大宽度 Max Width	1200mm	1600mm	1800mm	2000mm	2500mm	3000mm	3500mm
螺杆直径 Screw Diameter	φ65mm	φ70mm	φ75mm	φ75mm	φ80mm	φ90mm	φ100mm
螺杆长度 Screw L/D	33:1	33:1	33:1	33:1	33:1	33:1	33:1
主电机功率 Exhuder Motor Power	18kw	22kw	22kw	30kw	30kw	37kw	45kw
牵引电机功率 Take-up Motor Power	1.5kw	2.2kw	2.2kw	2.2kw	3kw	3kw	3kw
真空吸盘 Vacuum Pump	1.1kw	1.5kw	1.5kw	2kw	2.2kw	3kw	3kw
速度 Speed	5-30m/min	5-30m/min	5-30m/min	5-30m/min	5-30m/min	5-30m/min	5-25m/min
总功率 Power	70kw	90kw	105kw	115kw	135kw	168kw	200kw